


FERROTEC CONFIDENTIAL

- 1). The resistance of the module is within 1.281 to 1.564 ohms at an ambient temperature of 25 degrees Celsius;
- 2). Material of lead wires: #22 AWG Tinned Single Strand.
- 3). All the substrates are ALN.
- 4). Both side of module have been metallized.

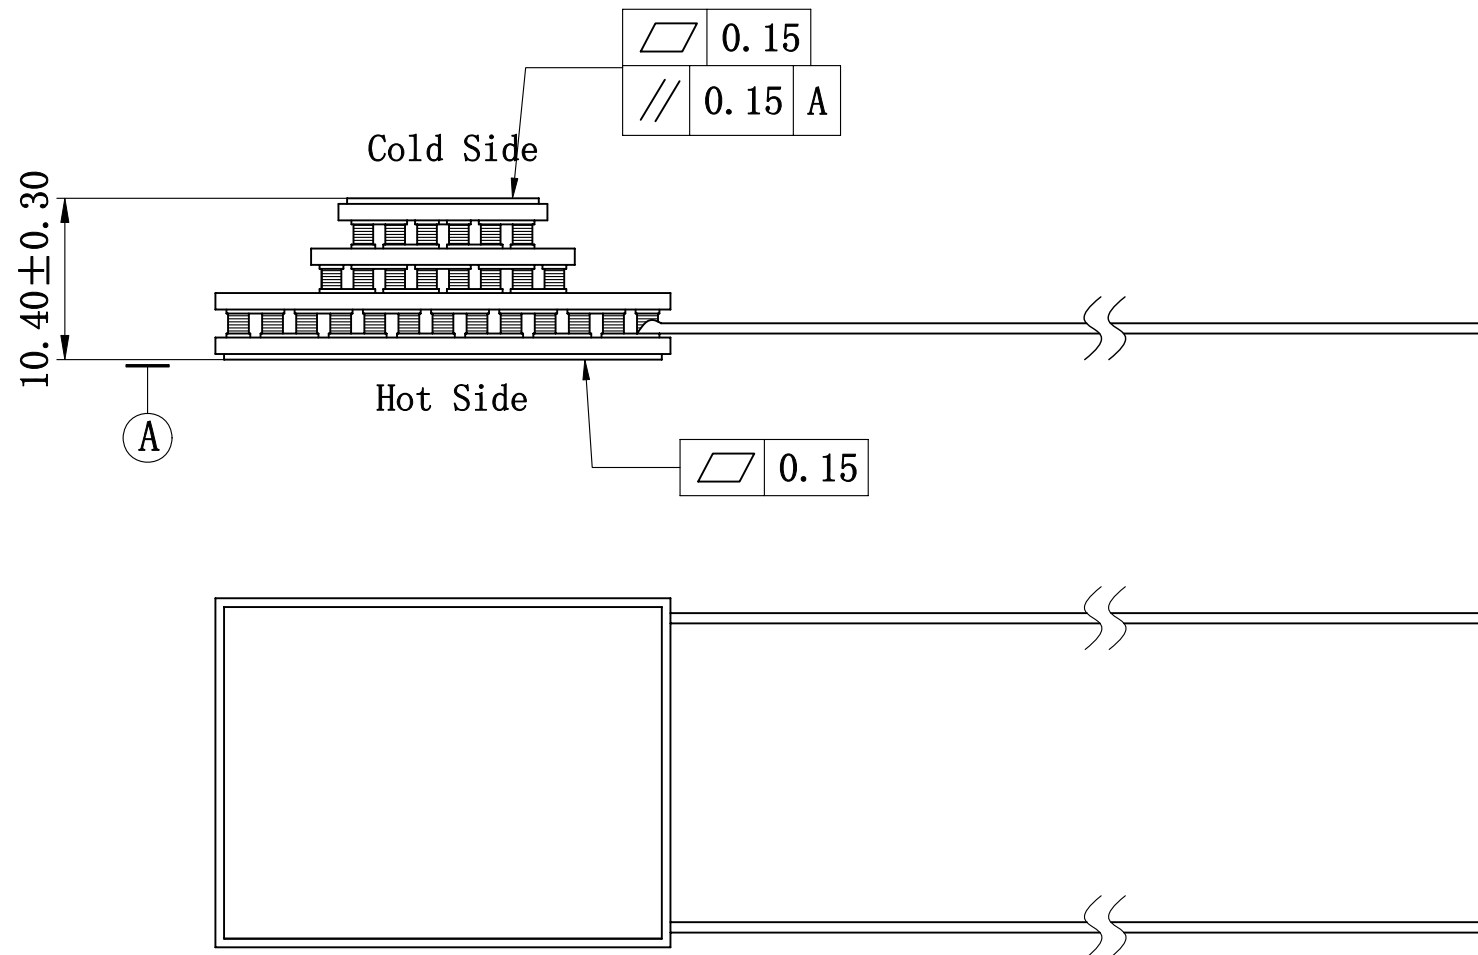

Item	Value	Conditions
I _{max}	4.3A	Q _c =0, DT=DT _{max} , Th=50°C
V _{max}	8.1V	Q _c =0, I=I _{max} , Th=50°C
DT _{max}	117°C	Q _c =0, I=I _{max} , Th=50°C
Q _{cmax}	6.1W	I=I _{max} , DT=0, Th=50°C
Th _{max}	200°C	Momentary

Ferrotec Corporation
 (Zhijiang Factory)
 668# Binkang Road, Hangzhou Hi-tech
 Garden, Zhejiang Province, P.R.China

General Dimension Tolerance			Pls	Date	Modifying	Summary Of Modification	By	Designed Lu Jiejian 2013.1.18	Checked Wu Yongqing 2013.1.18	Finished Mark	Title 2030/099/043MN	Proj. 3 Angle
Process	Cutting	Forging										
Size Range	Common	Special	Common								Drawing Number	1/1
less than 6	±0.1										T0709-5900E	
6 up to 30	±0.2	±0.15	±0.5									P/N
30 up to 120	±0.3	±0.2	±0.7								83914	
120 up to 315	±0.5	±0.25	±1.0									Scale Do Not Scale
315 up to 1000	±0.8	±0.4	±1.5								Raw Material Weight	
1000 up to 2000	±1.2	±0.6	±2.0									