



FERROTEC CONFIDENTIAL

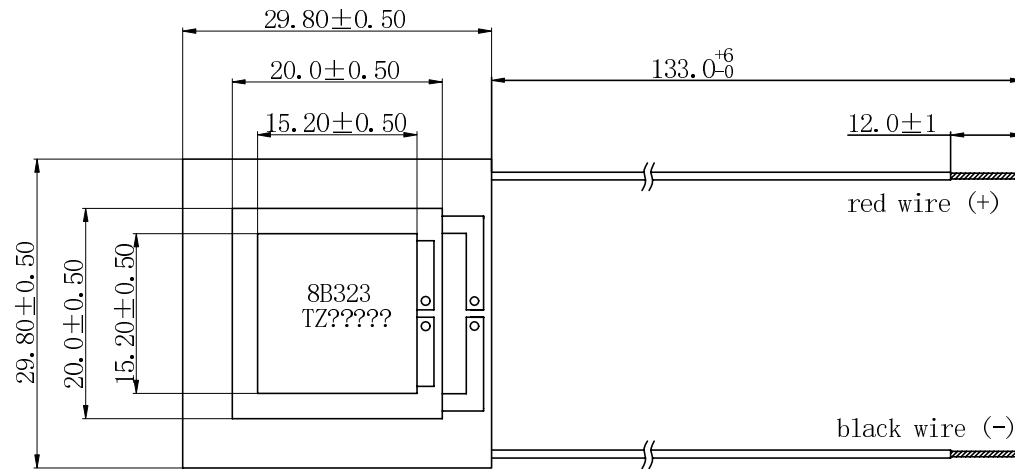

- 1) The resistance of the module shall be within 1.269 to 1.549 ohms at an ambient temperature of 25 degrees Celsius.
- 2) The lead wire material: #20 AWG Type-E Teflon MIL-W-16878E/4.
- 3) The end of the lead wires shall be pre-tinned.
- 4) Lot Number and Part Number shall be stamped on the cold side with black color.

ROHS COMPLIANCE

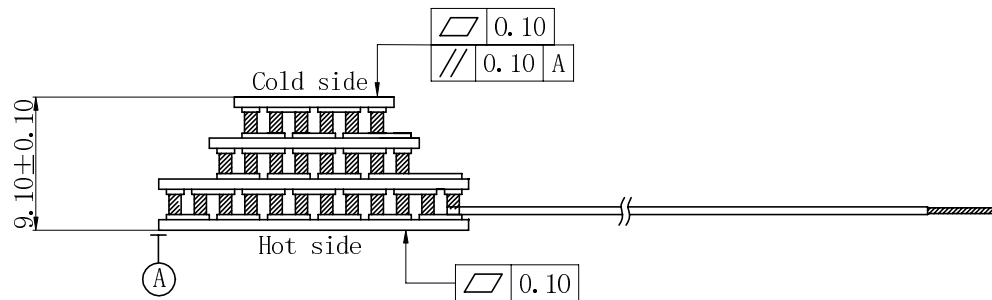

Item	Value	Conditions
I _{max}	4.5A	Q _c =0, DT=DT _{max} , Th=50°C
V _{max}	8.6V	Q _c =0, I=I _{max} , Th=50°C
DT _{max}	111°C	Q _c =0, I=I _{max} , Th=50°C
Q _{cmax}	9.7W	I=I _{max} , DT=0, Th=50°C
Th _{max}	200.0°C	Maximum Processing Temperature



General Dimension Tolerance				PLs	Date	Summary Of Modification	By	Designed	2014.6.5	Finished Mark	Title	Proj.
Process	Cutting		Forging	▲				Jiang	2014.6.5	Material	2030/119/045B	3
	Size Range	Common	Special					Common				
less than 6	±0.1	±0.15	±0.5	▲				Yongqing Wu	2014.6.5	Material	T1406-2900	1/1
6 up to 30	±0.2			▲				Approved		Finish		
30 up to 120	±0.3	±0.2	±0.7	▲						Raw Material Size	P/N	Rev.
120 up to 315	±0.5	±0.25	±1.0	▲						Raw Material Weight		
315 up to 1000	±0.8	±0.4	±1.5	▲							8B323	Z
Angel	±5°	±1°	±5°	▲								
											Do Not Scale	