



FERROTEC CONFIDENTIAL

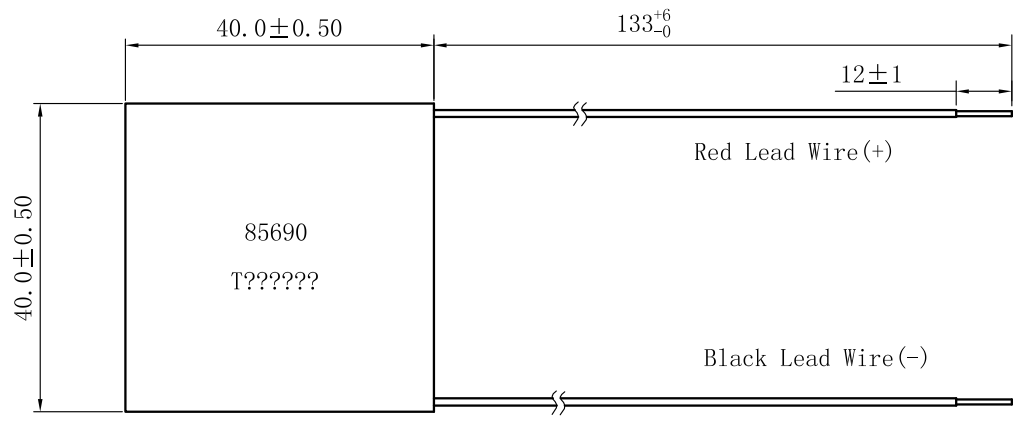

- 1) The resistance of the module shall be within 1.805 to 2.203 ohms at an ambient temperature of 25 degrees Celsius.
- 2) The lead wire material: #22 AWG Type-E Teflon MIL-W-16878E/4. The end of the lead wires shall be pre-tinned.
- 3) Lot Number and Part Number shall be stamped on the cold side with black color.

ROHS COMPLIANCE

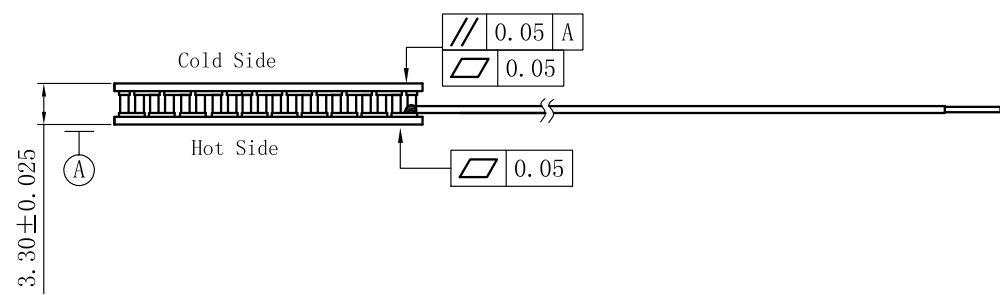

Item	Value	Test Conditions
I _{max}	10.0A	Q _c =0, DT=DT _{max} , Th=50°C
V _{max}	28.3V	Q _c =0, I=I _{max} , Th=50°C
DT _{max}	83°C	Q _c =0, I=I _{max} , Th=50°C
Q _{cmax}	148W	I=I _{max} , DT=0, Th=50°C
Th _{max}	200°C	Momentary

Ferrotec Corporation (Zhijiang Factory) 668# Binkang Road, Hangzhou Hi-tech Garden, Zhejiang Province, P.R.China	General Dimension Tolerance		PLs	Date Modifying	Summary Of Modification	By	Designed Jiang	2014/2/12	Finished Mark	Title	Proj.	
	Process									72008/199/100B	3	
	Size Range		Common	Special	Common			Checked Yongqing Wu	2014/2/12	Material	Drawing Number	Angle
	less than 6		±0.1	±0.15	±0.5			Approved		Finish	T1401-2800	1/1
	6 up to 30		±0.2	±0.2	±0.7			Approved		Raw Material Size	P/N	Rev.
30 up to 120		±0.3	±0.2	±1.0			Approved		Raw Material Weight	85690	Scale:	
120 up to 315		±0.5	±0.25	±1.5			Approved				Do Not Scale	
315 up to 1000		±0.8	±0.4	±2.0			Approved				Z	
1000 up to 2000		±1.2	±0.6	±2.0								